



Dynamic Ballast Corp.
 41 Smith Street
 Englewood, NJ 07631
 www.DYnamicballast.com

ELECTRONIC BALLAST

DATA SHEET


DY 132 IS WV

Starting Method: Instant Start
 Connection: Parallel
 Input Voltage: 120-277
 Input Frequency: 50/60 Hz
 Model #: DY132ISWV


120V Operational Data

Lamp Type	Number of Lamps	Rated Lamp Watts	Min. Start Temp. (°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	Max THD %	Min. Power Factor	Max. LCCF	B.E.F
F17T8	1	17	0/-18	0.15	18	0.89	10	98%	1.7	4.94
F25T8	1	25	0/-18	0.20	25	0.88	10	98%	1.7	3.52
F32T8	1	32	0/-18	0.26	30	0.88	10	98%	1.7	2.93
F40T8	1	40	0/-18	0.32	38	0.86	10	98%	1.7	2.26
FB16T8	1	16	0/-18	0.14	17	0.89	10	98%	1.7	5.24
FB24T8	1	24	0/-18	0.20	24	0.88	10	98%	1.7	3.67
FB31T8	1	31	0/-18	0.25	31	0.88	10	98%	1.7	2.84
FT40T5	1	40	0/-18	0.29	35	0.87	10	98%	1.7	2.49

Wiring Diagram: Diagram A

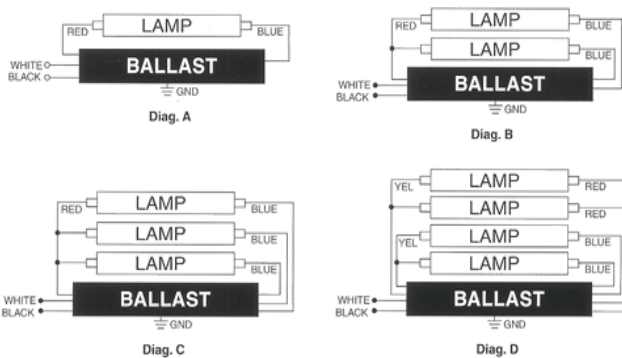

Enclosure

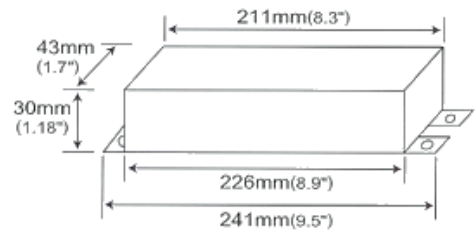

Lead Lengths (in.)

Black	25"		
White	25"		
Blue	31"		
Red	37"		
Yellow			
Blue/White			